

TANDEM AXLE OVER THE AXLE TRAILER


G.V.W.R.	9,990#	AXLES	Two 5200# EZ LUBE w/ Elec. Brakes
G.A.W.R. (EA. AXLE)	5,080#	SUSPENSION	Multi-Leaf Spring w/ Equalizer
COUPLER	2-5/16" Adjustable Bulldog	TIRE	ST225/75-15 Load Range D
SAFETY CHAINS	1/4" Grd. 70 w/ Safety Latch Hook (2 ea.)	WHEEL	15 X 6 White Spoke 6 Bolt
JACK	7K Drop Leg Jack, Bolted On	FLOOR	2" Pine
TONGUE	Integral With Frame	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL	(none)	ELEC. PLUG	7-Way RV
FRAME	10" I-Beam	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS	3" x 3.5# channel	FINISH	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
SIDE RAILS	3" X 5" Angle w/ Stake Pockets & Rubrail on Both Sides, Front & Rear		

STANDARD FEATURES

- Two 5200# Cambered Axles w/ 2 Electric Brakes
- Complete Break-A-Way System w/ Charger
- Adjustable Coupler In Channel
- Cambered Ez Lube Axles
- Jack Bolted On For Easy Replacement
- Safety Chains Attached w/ Cold Rolled Eyelets
- Spare Tire Mount
- Floor Secured w/ 5/16" Torx Screws
- Rub Rail w/ Stake Pockets
- Rubber Mounted, Sealed Lighting
- Reflective Marker Tape

100A-16

LENGTH	DIMENSIONS		
	A	B	C
14'	169-1/2"	66-1/2"	103"
16'	193-1/2"	78-1/2"	115"
18'	217-1/2"	90-1/2"	127"
20'	240"	102"	138"

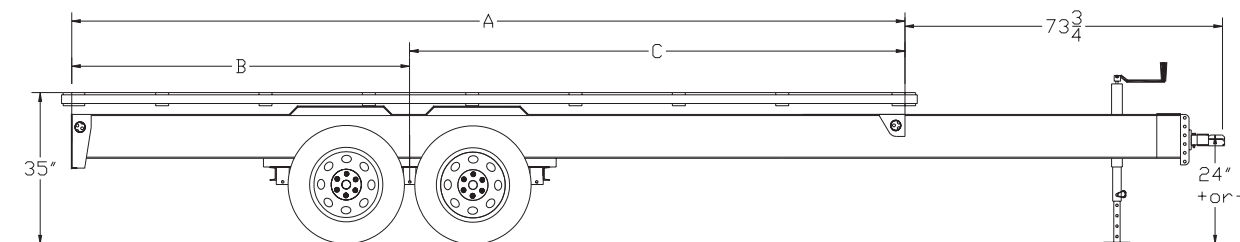

PRICING

MODEL #	WEIGHT	DESCRIPTION
100A-14	2100#	102" X 14' Tandem Over The Axle Trailer
100A-16	2250#	102" X 16' Tandem Over The Axle Trailer
100A-18	2350#	102" X 18' Tandem Over The Axle Trailer
100A-20	2450#	102" X 20' Tandem Over The Axle Trailer

OPTIONS

Hydraulic Brakes On 1 Axle w/ Adjustable Demco Actuator	
Hydraulic Brakes On 2 Axles w/ Adjustable Demco Actuator	
15" Spare Tire & Wheel - Load Range D	
Tire Upgrade to 16" - 7.50-16 LR-E	
Spare Tire Upgrade to 16" - 7.50-16 LR-E	
1/8" Diamond Plate Steel Floor (Per Sq. Ft.)	
10K Heavy Duty Drop Leg Jack - Top Wind	
Adjustable Pintle In Channel	