


12GN / 12PH TANDEM AXLE GOOSENECK

G.V.W.R. 12,000#	AXLES Two 6000# EZ LUBE w/ Elec. Brakes
G.A.W.R. (EA. AXLE) 5,560#	SUSPENSION Multi-Leaf Slipper Spring w/ Equalizer
COUPLER 2-5/16" Ball Adj. Pipe / 3" ID Pintle on PH	TIRE 7.50-16LT Load Range E
SAFETY CHAINS 3/8" Grd. 70 w/Safety Latch Hook (2 ea.)	WHEEL 6.00 X 16" White Spoke 8 Bolt
JACK 10,000# Drop Leg Jack (Bolted On)	FLOOR 2" Pine
NECK 10" Channel	LIGHTS D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL (none)	ELEC. PLUG 7-Way RV
FRAME 12" - 16# I-Beam	FINISH (PREP) Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS 3" channel	FINISH Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
SIDE RAILS 6" Channel w/ Rub Rail and Stake Pockets on 24" Centers	

STANDARD FEATURES

- 5' Dovetail w/Double Hinged Fold-Over Ramps
- Complete Break-A-Way System w/ Battery & Charger
- Rubber Mounted Sealed Lighting
- Cambered Ez Lube Axles
- 3/8" Heavy Duty Rub Rail
- 96" Overall Width
- Spare Mount
- Pintle has Single TW Drop-Leg Jack
- Safety Reflective Marker Tape
- Bolt On Jack w/ Greasable Handle
- Floor Secured w/ 5/16" Torx Screws

LENGTH	DIMENSIONS- STRAIGHT DECK			DIMENSIONS- WITH DOVETAIL		
	A	B	C	D	B	E
20'	240"	160"	80"	300"	196"	104"
22'	264"	176"	88"	324"	216"	108"
24'	288"	192"	96"	348"	232"	116"
26'	312"	208"	104"	372"	248"	124"

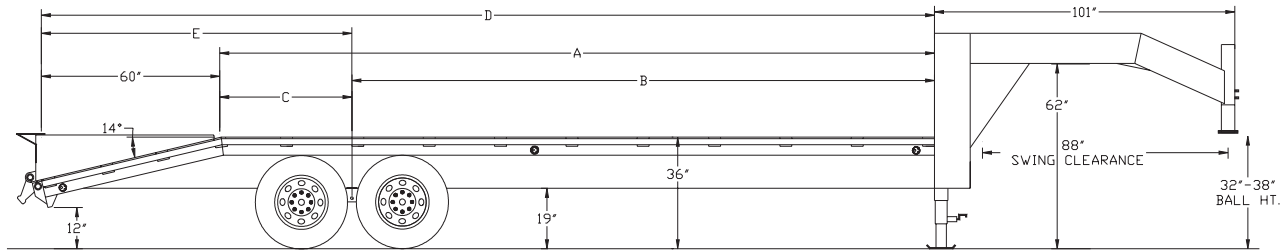

PRICING

MODEL #	WEIGHT	DESCRIPTION
12GN-20+5	4625#	96" X 20'+5' Tandem 12,000# Gooseneck/Pintle (12PH)
12GN-22+5	4985#	96" X 22'+5' Tandem 12,000# Gooseneck/Pintle (12PH)
12GN-24+5	5340#	96" X 24'+5' Tandem 12,000# Gooseneck/Pintle (12PH)
12GN-26+5	5695#	96" X 26'+5' Tandem 12,000# Gooseneck/Pintle (12PH)

OPTIONS

No Dovetail (Straight Deck)	
5' Center Pop-Up Dovetail w/ 5' Fold-up Ramps (Must Be 102" Wide)	
102" Wide Bed	
16" Spare Tire & Wheel	
Tool Box 18" X 18" X 36" (Side Mount)	