


14GN / 14PH TANDEM AXLE GOOSENECK

G.V.W.R. 14,000#	AXLES Two 7000# EZ LUBE w/ Elec. Brakes
G.A.W.R. (EA. AXLE) 6,400#	SUSPENSION Multi-Leaf Slipper Spring w/ Equalizer
COUPLER 2-5/16" Ball Adj. Pipe / 3" ID Pintle on PH	TIRE ST235/85R16 Load Range D
SAFETY CHAINS 3/8" Grd. 70 w/Safety Latch Hook (2 ea.)	WHEEL 6.00 X 16" HD White Modular – 8 Bolt
JACK 10,000# Drop Leg Jack (Bolted On)	FLOOR 2" Pine
NECK 10" Channel	LIGHTS D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL (none)	ELEC. PLUG 7-Way RV
FRAME 12" – 16# I-Beam	FINISH (PREP) Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS 3" Channel	FINISH Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
SIDE RAILS 6" Channel w/ Rub Rail and Stake Pockets on 24" Centers	

STANDARD FEATURES

- 5' Dovetail w/Double Hinged Spring Assist Fold-Over Ramps
- Complete Break-A-Way System w/ Battery & Charger
- Rubber Mounted Sealed Lighting
- Cambered Ez Lube Axles
- (2) Side Bed Steps
- Spare Tire Mount
- 3/8" Heavy Duty Rub Rail
- 102" Overall Width
- Chain Basket between the gooseneck
- Pintle has Single TW Drop-Leg Jack
- Modular Sealed Wiring Harness
- Safety Reflective Marker Tape
- Bolt On Jack w/ Greasable Handle
- Radial Tires on HD Wheels
- Floor Secured w/ 5/16" Torx Screws

DIMENSIONS- STRAIGHT DECK				DIMENSIONS- WITH DOVETAIL		
LENGTH	A	B	C	D	B	E
20'	240"	160"	80"	300"	196"	104"
22'	264"	176"	88"	324"	216"	108"
24'	288"	192"	96"	348"	232"	116"
26'	312"	208"	104"	372"	248"	124"
28'	336"	224"	112"	396"	264"	132"

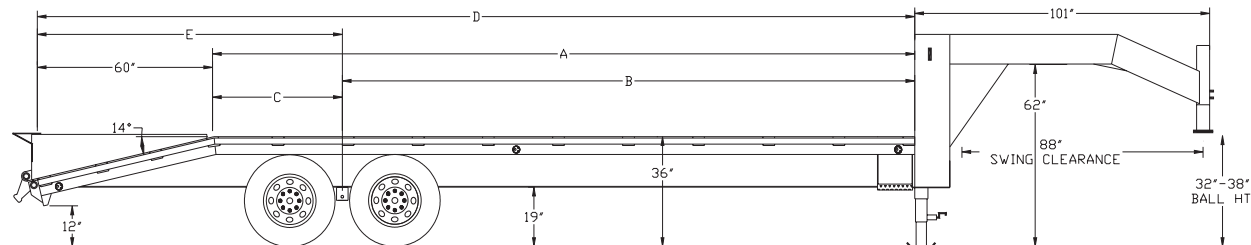

PRICING

MODEL #	WEIGHT		DESCRIPTION
14GN-20+5	4825#	102" X 20'+5'	Tandem 14,000# Gooseneck/Pintle (14PH)
14GN-22+5	5085#	102" X 22'+5'	Tandem 14,000# Gooseneck/Pintle (14PH)
14GN-24+5	5440#	102" X 24'+5'	Tandem 14,000# Gooseneck/Pintle (14PH)
14GN-26+5	5795#	102" X 26'+5'	Tandem 14,000# Gooseneck/Pintle (14PH)
14GN-28+5	6155#	102" X 28'+5'	Tandem 14,000# Gooseneck/Pintle (14PH)

OPTIONS

No Dovetail (Straight Deck)	
5' Center Pop-Up Dovetail w/ 5' Fold-up Ramps	
Torsion Axles	
Square Adjustable Screw Type Coupler	
Dual Drop Leg Jacks (Single Speed)	
Single Two Speed Drop-Leg Jack	
Dual Two Speed Landing Gear Jacks (150K)	
Deck On The Neck (6')	
16" Spare Tire & Wheel	
16" Spare Tire & Wheel – Load Range G	
Tire Upgrade to LT235/85R16 LR "G"	
Low Profile Tool Box 12" X 18" X 36" (Side Mount)	
Tool Box 18" X 18" X 36" (Side Mount)	