

20GN / 20PH

TANDEM DUAL AXLE GOOSENECK/PINTLE


G.V.W.R.	20,000#	AXLES	Two 10,000# Dual Wheel Electric Brake
G.A.W.R. (EA. AXLE)	9,760#	SUSPENSION	Multi-Leaf Slipper Spring w/ Equalizer
COUPLER	2-5/16" Ball Adjustable Pipe or Pintle	TIRE	750 X 16 Load Range E
SAFETY CHAINS	3/8" Grd. 70 w/ Safety Latch Hook (2 ea.)	WHEEL	16 X 6 Dual 8 Bolt
JACK	10,000# Drop Leg Jack (Bolted On)	FLOOR	2" Pine
NECK	10" Channel (If Applicable)	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL	(none)	ELEC. PLUG	7-Way RV
FRAME	12" - 16# I-Beam	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS	3" Channel	FINISH	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
SIDE RAILS	6" Channel w/ Rub Rail and Stake Pockets on 24" Centers		

STANDARD FEATURES

- Complete Break-A-Way System w/ Battery & Charger
- Rubber Mounted Sealed Lighting
- 102" Overall Width
- 5' Dovetail w/ Double Hinged Fold-Over Ramps
- 3/8" Heavy Duty Rub Rail
- Spare Mount
- Safety Reflective Marker Tape
- Bolt On Jack w/ Greasable Handle
- Two 10,000# Oil Bath Axles


LENGTH	A	B	C
20'	300"	196"	104"
24'	348"	232"	116"

20GN-20+5

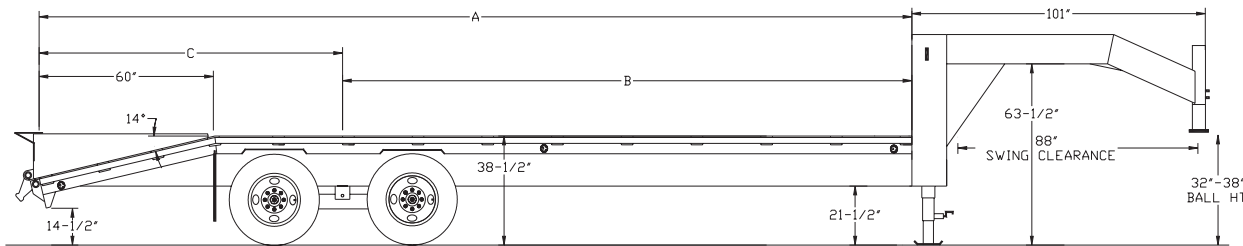

LENGTH	A	B	C
20'	300"	196"	104"
24'	348"	232"	116"

20PH-20+5

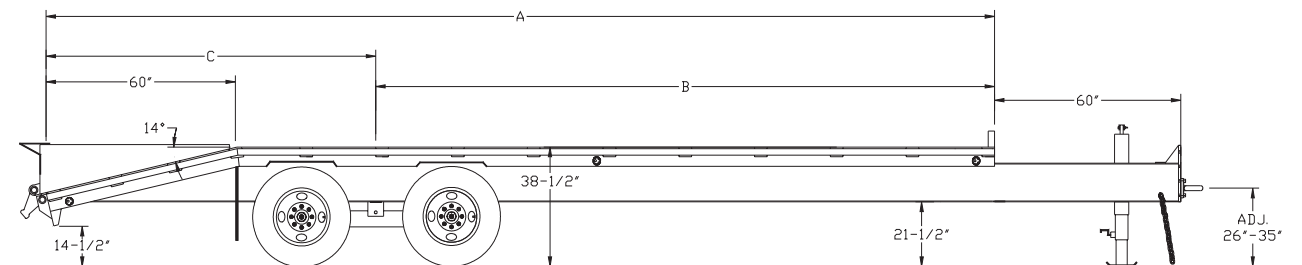

PRICING

MODEL #	WEIGHT	DESCRIPTION	
20GN-20+5	5440#	102" X 20'+5' Tandem Dual 20,000# Gooseneck	
20GN-24+5	5920#	102" X 24'+5' Tandem Dual 20,000# Gooseneck	
20PH- 20+5	5100#	102" X 20'+5' Tandem Dual 20,000# Pintle Hitch	
20PH- 24+5	5580#	102" X 24'+5' Tandem Dual 20,000# Pintle Hitch	

OPTIONS

Standard Spare Tire & Wheel - Load Range - E	
Tire Upgrade to ST235/85R16 LR-D	
Spare Upgrade to ST235/85R16 LR-D	

Prices Effective January 1, 2005

© 2005 Copyright by Big Tex Trailer Manufacturing, Inc.