

TANDEM DUAL AXLE GOOSENECK/PINTLE


G.V.W.R.	22,500#	AXLES	Two 10,000# Dual Wheel Electric Brake (Oil Bath)
G.A.W.R. (EA. AXLE)	10,000#	SUSPENSION	Multi-Leaf Slipper Spring with Equalizer
COUPLER	2-5/16" Ball Adj. Square Crank Type	TIRE	ST235/85R16 Load Range D
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2 ea.)	WHEEL	16 X 6 Dual 8 Bolt
JACKS	Two 10,000# Drop Leg Jacks (Bolted On)	FLOOR	2" Pine
NECK	10" Channel	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL	(none)	ELEC. PLUG	7-Way RV
FRAME	12"- 16# I-Beam w/Bridge Truss	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS	3" Channel	FINISH	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
SIDE RAILS	6" Channel w/Rub Rail and Stake Pockets on 24" Centers		

STANDARD FEATURES

- 5' Dovetail w/Double Hinged Spring Assist Fold-Over Ramps
- Complete Break-A-Way System w/ Battery & Charger
- Rubber Mounted Sealed Lighting
- Spare Tire Mount
- (2) Side Bed Steps
- Two Bolt On Jacks w/ Greasable Handle (PH Has Single TW Drop-Leg Jack)
- 102" Overall Width
- 28' (Flat Deck) and Longer Include Torque Tube
- Safety Reflective Marker Tape
- Two 10,000# Oil Bath Axles
- Radial Tires
- Modular Sealed Wiring Harness

- Formed Crossmember to Frame Gussets
- Chain Basket Between Gooseneck Uprights

DIMENSIONS- STRAIGHT DECK				DIMENSIONS- WITH DOVETAIL		
LENGTH	A	B	C	D	B	E
20'	240"	160"	80"	300"	196"	104"
22'	264"	176"	88"	324"	216"	108"
24'	288"	192"	96"	348"	232"	116"
26'	312"	208"	104"	372"	248"	124"
28'	336"	224"	112"	396"	264"	132"
30'	360"	240"	120"	420"	280"	140"
32'	384"	256"	128"	444"	296"	148"
34'	408"	272"	136"	468"	312"	156"
36'	432"	288"	144"	492"	328"	164"
40'	480"	320"	160"	540"	360"	180"

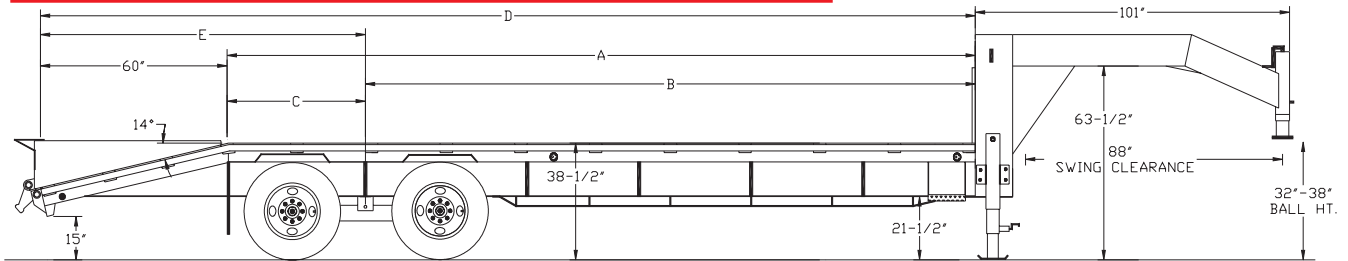

PRICING

MODEL #	WEIGHT	DESCRIPTION
22GN-20+5	5870#	102" X 20'+5' Tandem Dual 22,500# Gooseneck/Pintle - (22PH-20+5)
22GN-22+5	6430#	102" X 22'+5' Tandem Dual 22,500# Gooseneck/Pintle - (22PH-22+5)
22GN-24+5	6910#	102" X 24'+5' Tandem Dual 22,500# Gooseneck/Pintle - (22PH-24+5)
22GN-26+5	7390#	102" X 26'+5' Tandem Dual 22,500# Gooseneck/Pintle - (22PH-26+5)
22GN-28+5	7870#	102" X 28'+5' Tandem Dual 22,500# Gooseneck/Pintle - (22PH-28+5)
22GN-30+5	8350#	102" X 30'+5' Tandem Dual 22,500# Gooseneck/Pintle - (22PH-30+5)
22GN-32+5	8830#	102" X 32'+5' Tandem Dual 22,500# Gooseneck/Pintle - (22PH-32+5)
22GN-34+5	9480#	102" X 34'+5' Tandem Dual 22,500# Gooseneck/Pintle - (22PH-34+5)
22GN-35+5	9800#	102" X 35'+5' Tandem Dual 22,500# Gooseneck/Pintle - (22PH-35+5)
22GN-36	8640#	102" X 36' Tandem Dual 22,500# Gooseneck/Pintle - (Straight)
22GN-40	8950#	102" X 40' Tandem Dual 22,500# Gooseneck/Pintle - (Straight)

OPTIONS

No Dovetail (Straight Deck)	
5' Center Pop-Up Dovetail w/ 5' Fold-up Ramps	
Dual, Two Speed, Landing Gear Jacks (150K)	
Deck on the Neck (6')	
Vacuum Over Hydraulic Drum Brakes	
16" Spare Tire & Wheel	
Low Profile Tool Box 12" X 18" X 36" (Side Mount)	
Low Profile Deck Height	
Tool Box 18" X 16" X 36" (Side Mount)	