


# UTILITY PIPE TANDEM AXLE TRAILER

<b>G.V.W.R.</b>	7,000#	<b>AXLES</b>	Two 3500# EZ LUBE w/ 1 Electric Brake
<b>G.A.W.R. (EA. AXLE)</b>	3,500#	<b>SUSPENSION</b>	Multi-Leaf Spring With Equalizer
<b>COUPLER</b>	7K 2" Bulldog Coupler	<b>TIRE</b>	ST205/75-15 Load Range C
<b>SAFETY CHAINS</b>	1/4" Grd. 70 w/Safety Latch Hook (2 ea.)	<b>WHEEL</b>	15 X 5 White Spoke 5 Bolt
<b>JACK</b>	2000# Top Wind (Bolted On)	<b>FLOOR</b>	2" Pine
<b>TONGUE</b>	4" Channel Fold Back Tongue	<b>LIGHTS</b>	D.O.T. Stop, Tail, Turn and Clearance
<b>TOP RAIL</b>	2-3/8" Pipe Square Back	<b>ELEC. PLUG</b>	7-Way RV
<b>FRAME</b>	3" X 4" X 1/4" Angle	<b>FINISH (PREP)</b>	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
<b>CROSSMEMBERS</b>	2" X 3" X 3/16" Angle	<b>FINISH</b>	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
<b>UPRIGHTS</b>	16" Tall 2" X 3" X 3/16" Angle		
<b>FENDERS</b>	9" X 72" Tear Drop w/ Back		

## STANDARD FEATURES

- Lower Jack Support Plate
- Two 3500# Axles w/ 1 Electric Brake
- Complete Break-A-Way System w/ Charger
- 2-3/8" Pipe Top Rail Capped w/ Self-Sealing Plugs
- Fold Back Tongue (14' and longer)
- 4' Slide In Ramps
- Set Back Jack
- Cambered Ez Lube Axles
- Bulldog Forged Coupler
- Safety Chains Attached w/ Cold Rolled Eyelets
- Floor Secured w/ 5/16" Torx Screws
- 4 Tie Down Pockets

DIMENSIONS			
LENGTH	A	B	C
14'	169-1/2"	66-1/2"	103"
16'	193-1/2"	78-1/2"	115"
18'	217-1/2"	90-1/2"	127"
20'	240"	102"	138"

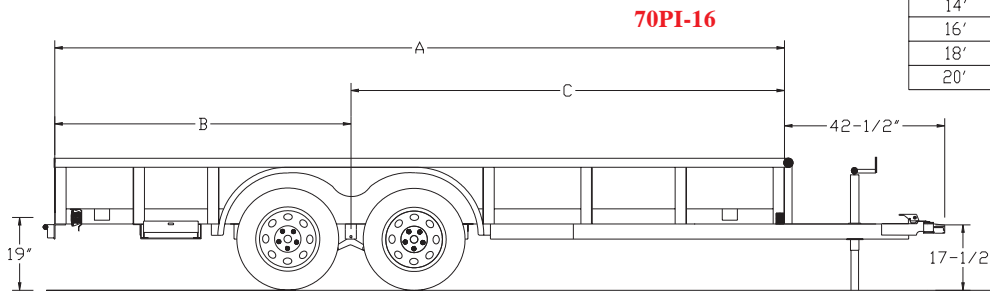

## PRICING

MODEL #	WEIGHT	DESCRIPTION
70PI-14	1670#	77" X 14' Tandem Axle Trailer
70PI-16	1770#	77" X 16' Tandem Axle Trailer
70PI-18	1895#	77" X 18' Tandem Axle Trailer
70PI-20	2020#	77" X 20' Tandem Axle Trailer

## OPTIONS

Electric Brakes On Two Axles	
Hydraulic Brakes On 1 Axle w/ Toledo Actuator	
Hydraulic Brakes On 2 Axles w/ Toledo Actuator	
Rampgate in Lieu of Ramps	
Extra Wide ( 83" Bed ) 102" Overall	
Spare Mount (Side)	
15" Spare Tire & Wheel	
Tire Upgrade to ST225/75D15 – Load Range C	
Spare Tire & Wheel Upgrade -ST225/75D15 – Load Range C	
2-5/16" Atwood Coupler	
2-5/16" Bulldog Coupler	
2K Fold-Up Jack	
Higher Sides (Each Additional Foot)	
Enclosed w/ Expanded Metal (Per Sq. Ft.)	
Enclosed w/ Sheet Metal (Per Sq. Ft.) Changes Toprail to 2" Sq. Tube	
1/8" Diamond Plate Floor (Per Sq. Ft.)	
Gas Spring Assist Option For Rampgate	

Prices Effective January 1, 2005